FLEXTEC® 350X

Simple. Reliable. Flexible.



Whether in a shop or in the field, the Flextec 350X welder is built to perform.

Equipped with CrossLinc technology, the Flextec 350X welder can be controlled from hundreds of feet away without expensive and inconvenient control cables. Desert Duty® and IP23 rated, it can withstand harsh outdoor conditions and outperform other welders in its class.

In the field the Flextec 350X Construction is a welder's most effective weapon. As a rugged multi-process power source, this model stays reliable and offers much more than other inverter-based welders in its class.

In the shop the Flextec 350X Standard model is built to work with all 42V feeders for your factory applications. It is also compatible with Arclink® digital feeders to provide synergic modes and memories for quick setup and worry free welding.

Processes

SMAW, GTAW, GMAW, FCAW, Arc Gouging

Applications

Fabrication, Construction, Pipeline, Process Pipe

Input





Output







Product Number

K4283-1 Flextec 350X Construction K4284-1 Flextec 350X Standard











Features

SIMPLE

- Simple interface for ease of use
- CrossLinc technology automatically pairs the accessory with the power source and provides remote output control at the arc without additional remotes or cables^[1]

RELIABLE


- Lab tested, field proven ruggedness and durability
- Engineered for outdoor use and harsh environments
- IP23 rated for use in outdoor weather conditions
- Desert Duty rated for operation at temperatures up to 55° C (131° F)
- Trayed and potted PC boards to withstand welding dust and humidity

FLEXIBLE

- Multi-process power source for all your welding needs
- Optimized stick welding for both cellulosic and low hydrogen electrodes
- Compatible with all across-the-arc and CrossLinc enabled 42V wire feeders for GMAW and FCAW welding
- ArcLink enabled to provide synergic modes
- Touch-Start TIG® for easy, contamination-free
- ^[1] Requires CrossLinc technology enabled wire feeder or CrossLinc remote.

SIMPLE

Flextecs are meant to be easy to use in order to increase productivity and decrease downtime. With a user-friendly control setup, settings can be configured with ease.

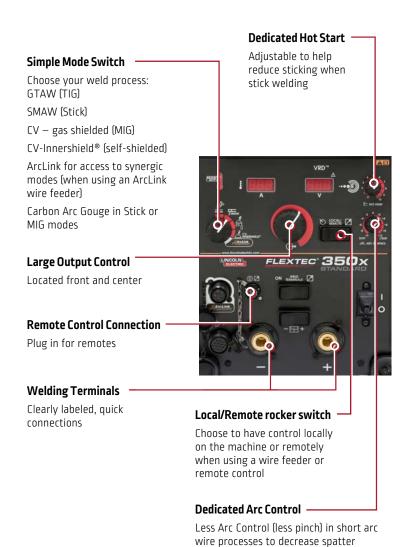

More arc control in Stick welding reduces

chance of sticking during welding

WELDING TECHNOLOGY



RELIABLE

Flextecs are built to withstand harsh conditions so that they last to help get the job done. Operating in challenging environments, these machines are durable and protected from the elements.

> Solid control knobs and rocker switches resistant to damage from spatter and hot welding wires

Automotive grade Molex® connectors, heavy gauge wire, locking tabs for secure connection, rubber boots to keep contaminants out.

Trayed and potted PC boards for physical and environmental protection



Tough alloy handles for lifting and impact protection

Lightweight aluminum powder painted case for rust protection

Rubber feet for impact protection



Fan-As-Needed (F.A.N.)



FLEXIBLE

Flextecs are meant to be just that, flexible. With a variety of process and feeder compatibility, the Flextec product line is made up of the most versatile welders on the market.

Any Process

GTAW, SMAW, GMAW, FCAW-S, FCAW-G, CAC









info@weldingtechnology.co.nz www.weldingtechnology.co.nz

CROSSLINC TECHNOLOGY AND TRUE VOLTAGE TECHNOLOGY™ (TVT™)



CrossLinc w/True Voltage Technology (TVT) – Improve all aspects of your operation with CrossLinc Technology and TVT.



Safety

- · Reduce jobsite clutter by removing cumbersome control cables.
- Eliminate unnecessary movement of personnel across the jobsite.
- No need to drag heavy control cables around the site.



Quality

- Full output control at the arc results in the correct settings for every weld.
- True Voltage Technology (TVT) accurately compensates for voltage drop across long cable runs.
- Eliminate unintentional machine adjustments by helpers or other operators.




Productivity

- Setup faster with fewer cable connections.
- Eliminate trips to the power source to make procedure adjustments.
- Minimize rework with easy settings adjustments.

CrossLinc allows for amperage and voltage control at the welding arc to improve control of your operation.

No need for an additional control cable – communication occurs directly over the weld cables:


- 1. Set the desired voltage on the CrossLinc wire feeder
- 2. The feeder sends a signal to the CrossLinc power source
- 3. The power source will change to the desired voltage

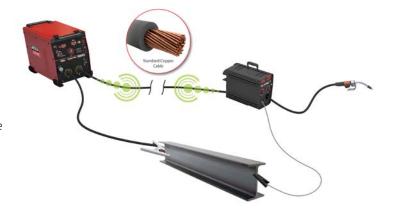

CrossLinc also features True Voltage Technology to compensate for voltage drop across the welding circuit.

TVT will measure the voltage drop and adjust the power source to compensate for the difference between the desired voltage and actual voltage at the weld.

- 1. Preset the wire feeder to the desired voltage.
- 2. Make a test weld.
- 3. The system will measure voltage drop and automatically adjust the power source to compensate.

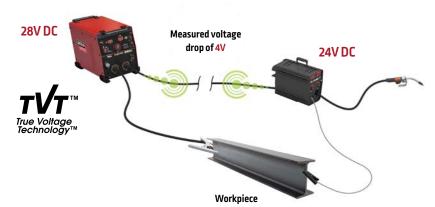

WELDING TECHNOLOGY



FLEXTEC 350X Construction Controls

- 1. Amperage Display
- 2. Thermal LED
- 3. Output Control Dial
- 4. Weld Process Selector Switch
- Remote Output Control (12-pin Universal Connector)
- 6. Positive and Negative Welding Output Studs (Tweco*-style)
- 7. Voltage Display
- 8. VRD™ (Voltage Reduction Device) Indicator Lights
- 9. CrossLinc™ Indicator Light
- 10. Hot Start Control Dial
- 11. Arc Force Control Dial
- 12. Local/Remote Selector Toggle Switch
- 13. Power Switch

FLEXTEC 350X Standard Controls

- 1. Amperage Display
- 2. Thermal LED
- 3. Output Control Dial
- 4. Weld Process Selector Switch
- Remote Output Control
 (12-pin Universal Connector)
- 6. 5-pin ArcLink® Wire Feeder Connector
- 7. 14-pin Wire Feeder Connector
- 8. Positive and Negative Welding Output Studs (Tweco-style)
- 9. Voltage Display
- 10. VRD (Voltage Reduction Device)Indicator Lights
- 11. CrossLinc™ Indicator Light
- 12. Hot Start Control Dial
- 13. Arc Force Control Dial
- 14. Local/Remote Selector Toggle Switch
- 15. Weld Terminals On/Remote Selector Switch
- 16. Power Switch
- 17. Wire Feeder Voltmeter Polarity

 Selection Switch







info@weldingtechnology.co.nz www.weldingtechnology.co.nz



Weld Power Cable Twist Mate to Twist Mate

K14166-1 (70MM2-10M)

K14166-2 (70MM2-15M)

K14166-3 (70MM2-5M)

K14166-4 (70MM2-30M)

K14167-1 (95MM2-30M)

K14167-2 (95MM2-5M) K14167-3 (95MM2-10M)

K14167-4 (95MM2-15M)



GRD-400A-70-xM*

Ground cable 400A 70 mm²; x=5/10/15 m



E/H-400A-70-xM*

Electrode holder 400A/70mm²; x=5/10m



K2909-1

12-pin to 6-pin Adapter



K857-2

12-pin Remote Output Control



K3059-4

Inverter and Wire Feeder Cart



K4424-1 Flextec 350x Locking Foot Kit



K4068-1

Inverter Cart Mounting Kit (required to secure Power Feed® and Flex Feed™ feeders on the cart)



K10095-1-15M

Remote control (6PIN, 15m)



K10398

Extension cable for remote control box K10095-1-15M



K3091-1

Multi-Process Switch

Easily change welding process and polarity without changing cables at the machine



FLEXTEC 350X - MODEL SELECTION

Machine	Flextec 350X Standard	Flextec 350X Construction	
Input Power	380-600/3/50/60	380-600/3/50/60	
3-phase	•	•	
CrossLinc compatible feeders	•	•	
14-pin Analog, 42V feeders	•		
5-Pin Digital, 42V feeders	•		
GTAW Touch Start TIG	•	•	
SMAW (Stick)	•	•	
GMAW (MIG)	•	•	
FCAW (Flux cored)	•	•	
FCAW-G (Gas shielded Flux-cored)	•	•	
Gouging (Recommended)	1/4"	1/4"	

MACHINE SPECIFICATIONS

Product Number	Product Name	Input Power	Rated Output Current/Voltage/ Duty Cycle	Input Current @Rated Output	Output Range	Dimensions HxWxL (mm)	Weight (kg)
K4283-1	Flextec 350X Construction	380/460/575/3/50/60 3-Phase	350A/34V/60%	24/22/22	5-425A Max OCV 80V DC	421 x 338 x 582	41,7
K4284-1	Flextec 350X Standard		300A/32V/100%	20/19/18			43,9

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company® is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change - This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.eu for any updated information.



WELDING TECHNOLOGY



LINCOLN